


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:12.00V I:1.100A P:13.20W PF:1.000 Freq:0Hz Lamp Flux:1235.82x1 lm		
NAME: D81201208NO	TYPE:	WEIGHT:
SPEC.:D81201208NO-9NWDA012WC0100	DIM.: 1000*8*1.5	SERIAL No.:01
MFR.: COLORS	SUR.:1000*8	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 93.62 lm/W			
MODEL	D81201208NO	I <sub>max</sub> (cd)	405.9	S/MH(C0/180)	1.26
NOMINAL POWER(W)	13.5	LOR(%)	100.0	S/MH(C90/270)	1.28
RATED VOLTAGE(V)	12	TOTAL FLUX(lm)	1235.8	h UP,DN(C0-180)	0.8,50.5
NOMINAL FLUX(lm)	1235.82	CIE CLASS	DIRECT	h UP,DN(C180-360)	0.7,48.0
LAMPS INSIDE	1	h up(%)	1.5	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	12	h down(%)	98.5	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

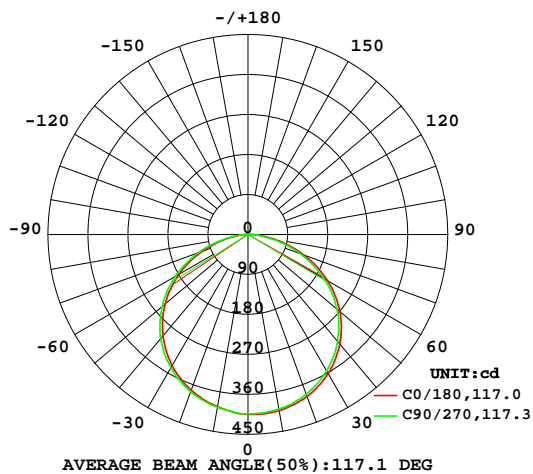

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

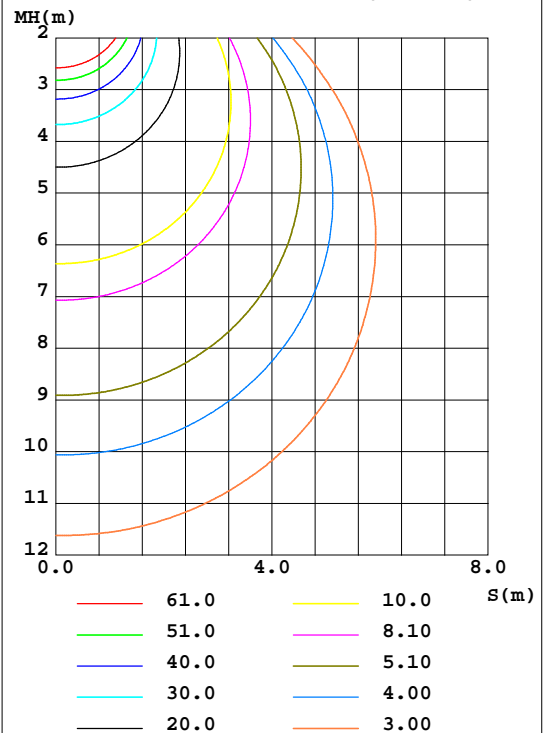

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-03-28

g Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	402.5	404.2	399.1	395.8	393.9	396.7	395.0	400.3	0- 10	38.32	38.32	3.1,3.1
20	388.2	386.4	382.7	377.3	373.4	376.3	376.9	384.0	10- 20	110.4	148.7	12,12
30	361.3	359.7	354.5	347.3	341.3	344.3	347.0	355.6	20- 30	169.5	318.2	25.7,25.7
40	321.7	320.7	313.8	305.7	297.9	300.9	305.5	314.7	30- 40	207.9	526.0	42.6,42.6
50	270.3	269.2	261.8	252.6	243.6	246.5	252.6	262.3	40- 50	219.9	745.9	60.4,60.4
60	205.8	206.2	196.3	189.2	179.5	180.8	188.9	196.8	50- 60	202.3	948.2	76.7,76.7
70	132.9	133.2	123.9	117.3	108.1	109.2	117.2	124.3	60- 70	155.7	1104	89.3,89.3
80	57.86	57.81	50.39	45.62	39.11	40.01	46.22	51.35	70- 80	88.46	1192	96.5,96.5
90	7.656	7.129	2.021	4.703	2.532	2.961	1.027	5.377	80- 90	24.44	1217	98.5,98.5
100	1.255	1.343	1.289	1.404	1.089	0.9598	0.8494	0.8213	90-100	1.799	1219	98.6,98.6
110	2.016	2.039	2.130	2.059	1.999	1.783	1.786	1.754	100-110	1.595	1220	98.7,98.7
120	3.045	3.069	3.219	2.868	2.842	2.624	2.606	2.516	110-120	2.388	1223	98.9,98.9
130	3.939	3.889	4.014	3.596	3.600	3.420	3.274	3.099	120-130	2.901	1225	99.2,99.2
140	4.682	4.442	4.555	4.296	4.215	4.200	3.754	3.546	130-140	3.033	1229	99.4,99.4
150	5.223	4.830	4.842	4.945	4.657	4.901	4.383	3.941	140-150	2.797	1231	99.6,99.6
160	5.777	5.218	5.497	5.538	5.197	5.550	5.298	4.681	150-160	2.317	1234	99.8,99.8
170	6.126	6.013	6.285	6.039	5.508	6.064	6.180	5.958	160-170	1.605	1235	100,100
180	5.985	6.940	6.940	6.940	5.978	6.893	6.947	6.953	170-180	0.5947	1236	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:JYH  
Test Date:2020-03-28

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.950m [K=1.0000]  
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:12.00V I:1.100A P:13.20W PF:1.000 Freq:0Hz Lamp Flux:1235.82x1 lm		
NAME: D81201208NO	TYPE:	WEIGHT:
SPEC.:D81201208NO-9NWDA012WC0100	DIM.: 1000*8*1.5	SERIAL No.:01
MFR.: COLORS	SUR.:1000*8	Shielding Angle:

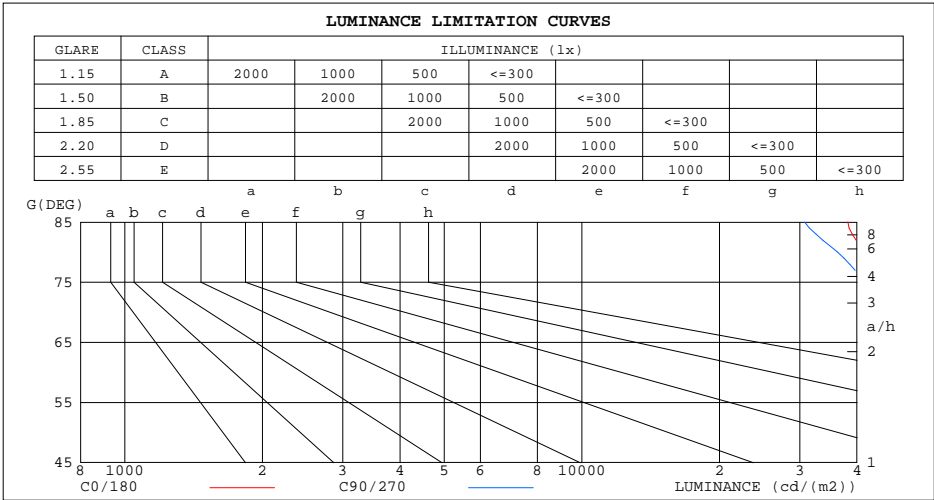

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	38228	30751
80	41647	36271
75	45744	41604
70	48555	45267
65	50285	47600
60	51440	49081
55	52259	50346
50	52556	50910
45	52585	51142


C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:JYH  
Test Date:2020-03-28

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.950m [K=1.0000]  
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:12.00V I:1.100A P:13.20W PF:1.000 Freq:0Hz Lamp Flux:1235.82x1 lm		
NAME: D81201208NO	TYPE:	WEIGHT:
SPEC.:D81201208NO-9NWDA012WC0100	DIM.: 1000*8*1.5	SERIAL No.:01
MFR.: COLORS	SUR.:1000*8	Shielding Angle:

r <sub>cc</sub>	80%			70%			50%			30%			10%			0
r <sub>w</sub>	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r <sub>fc</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio                      Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.98
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.89	.87	.88	.86	.84	.82
2.0	.90	.83	.77	.88	.81	.76	.84	.79	.74	.80	.76	.72	.77	.73	.70	.68
3.0	.79	.70	.64	.77	.69	.63	.74	.67	.62	.71	.65	.60	.68	.63	.59	.57
4.0	.69	.60	.54	.68	.60	.53	.65	.58	.52	.63	.56	.51	.60	.55	.51	.48
5.0	.62	.53	.46	.61	.52	.46	.58	.51	.45	.56	.50	.44	.54	.48	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.39	.51	.44	.39	.49	.43	.38	.36
7.0	.50	.41	.35	.49	.41	.35	.48	.40	.35	.46	.39	.34	.45	.39	.34	.32
8.0	.46	.37	.31	.45	.37	.31	.44	.36	.31	.42	.36	.31	.41	.35	.30	.28
9.0	.42	.34	.28	.41	.33	.28	.40	.33	.28	.39	.32	.28	.38	.32	.27	.25
10.0	.39	.31	.25	.38	.30	.25	.37	.30	.25	.36	.30	.25	.35	.29	.25	.23

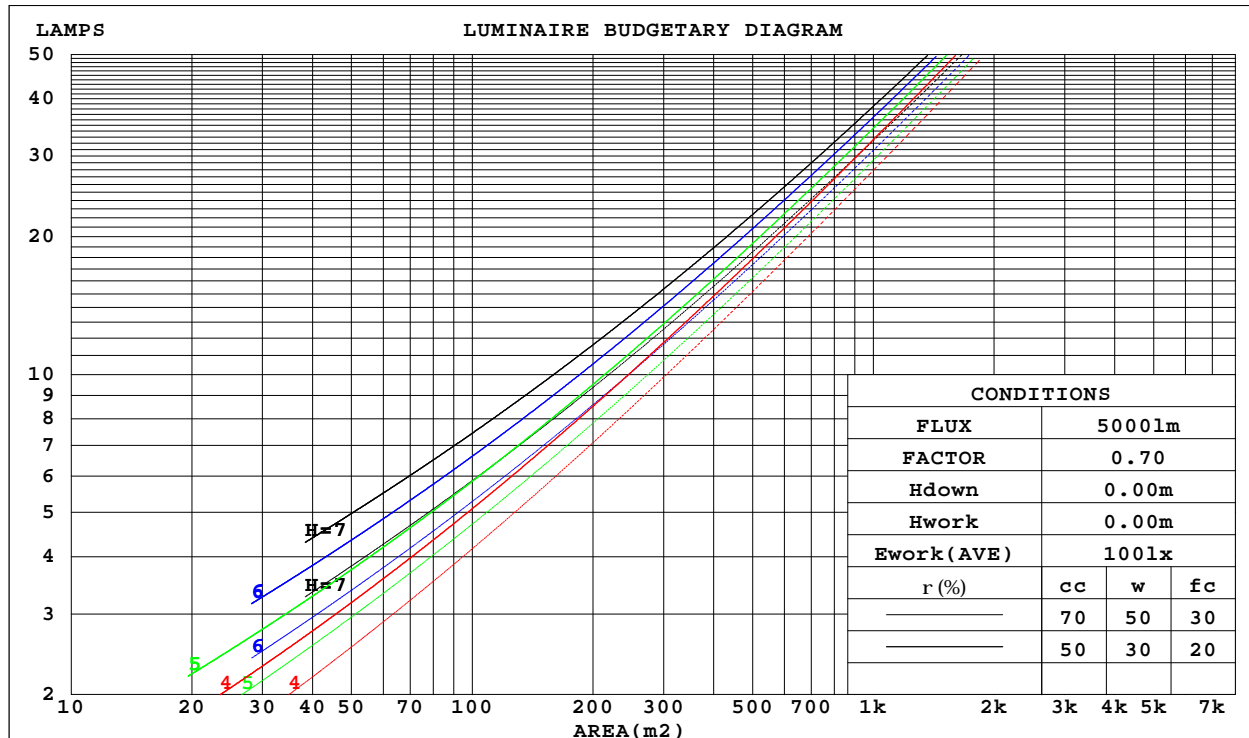

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-03-28

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

## WEC AND CCEC

Test:U:12.00V I:1.100A P:13.20W PF:1.000 Freq:0Hz Lamp Flux:1235.82x1 lm		
NAME: D81201208NO	TYPE:	WEIGHT:
SPEC.:D81201208NO-9NWDA012WC0100	DIM.: 1000*8*1.5	SERIAL No.:01
MFR.: COLORS	SUR.:1000*8	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0														
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
rfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.314	.178	.057	.306	.175	.055	.292	.168	.054	.279	.161	.052	.267	.155	.050															
2.0	.295	.162	.050	.288	.159	.049	.276	.153	.048	.264	.148	.046	.253	.143	.045															
3.0	.273	.145	.043	.267	.143	.043	.256	.139	.042	.245	.134	.041	.236	.131	.040															
4.0	.251	.131	.038	.246	.129	.038	.236	.125	.037	.227	.122	.037	.218	.119	.036															
5.0	.232	.118	.034	.228	.117	.034	.219	.114	.034	.210	.111	.033	.203	.108	.033															
6.0	.215	.108	.031	.211	.107	.031	.203	.104	.030	.196	.102	.030	.189	.099	.030															
7.0	.200	.099	.028	.196	.098	.028	.189	.096	.028	.183	.094	.027	.176	.092	.027															
8.0	.187	.091	.026	.183	.090	.026	.177	.088	.025	.171	.087	.025	.166	.085	.025															
9.0	.175	.085	.024	.172	.084	.024	.166	.082	.023	.161	.081	.023	.156	.079	.023															
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.152	.075	.021	.147	.074	.021															

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.202	.202	.202	.173	.173	.173	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.192	.168	.146	.165	.144	.126	.113	.099	.087	.065	.057	.050	.021	.018	.016	
2.0	.185	.144	.110	.158	.124	.095	.108	.086	.066	.062	.050	.039	.020	.016	.013	
3.0	.177	.126	.086	.152	.109	.074	.104	.076	.052	.060	.044	.031	.019	.014	.010	
4.0	.169	.113	.070	.145	.098	.061	.100	.068	.043	.058	.040	.025	.019	.013	.008	
5.0	.162	.103	.059	.139	.089	.051	.096	.062	.036	.056	.036	.021	.018	.012	.007	
6.0	.155	.094	.051	.133	.082	.044	.092	.057	.031	.053	.034	.019	.017	.011	.006	
7.0	.148	.088	.045	.127	.076	.039	.088	.053	.028	.051	.031	.017	.017	.010	.005	
8.0	.142	.082	.041	.122	.071	.035	.084	.050	.025	.049	.029	.015	.016	.010	.005	
9.0	.135	.077	.037	.117	.067	.033	.081	.047	.023	.047	.028	.014	.015	.009	.005	
10.0	.130	.073	.035	.112	.063	.030	.078	.044	.021	.045	.026	.013	.015	.009	.004	

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:JYH  
Test Date:2020-03-28

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.950m [K=1.0000]  
Remarks:

## UGR(Unified Glare Rating) Table

Test:U:12.00V I:1.100A P:13.20W PF:1.000 Freq:0Hz Lamp Flux:1235.82x1 lm										
NAME: D81201208NO					TYPE:			WEIGHT:		
SPEC.:D81201208NO-9NWDA012WC0100					DIM.: 1000*8*1.5			SERIAL No.:01		
MFR.: COLORS					SUR.:1000*8			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	26.1	27.6	26.4	27.8	28.1	25.9	27.4	26.2	27.7	27.9
3H	27.7	29.1	28.0	29.4	29.6	27.5	28.9	27.8	29.1	29.4
4H	28.4	29.7	28.7	30.0	30.3	28.1	29.4	28.4	29.7	30.0
6H	28.9	30.1	29.2	30.4	30.7	28.5	29.8	28.9	30.1	30.4
8H	29.0	30.2	29.4	30.5	30.9	28.6	29.8	29.0	30.1	30.5
12H	29.1	30.3	29.5	30.6	30.9	28.7	29.9	29.1	30.2	30.5
4H 2H	26.7	28.1	27.1	28.3	28.6	26.6	27.9	26.9	28.2	28.5
3H	28.5	29.7	28.9	30.0	30.4	28.3	29.5	28.7	29.8	30.2
4H	29.3	30.4	29.7	30.7	31.1	29.1	30.1	29.5	30.5	30.9
6H	29.9	30.9	30.4	31.3	31.7	29.6	30.6	30.0	30.9	31.3
8H	30.1	31.0	30.6	31.4	31.8	29.8	30.7	30.2	31.1	31.5
12H	30.3	31.1	30.7	31.5	32.0	29.9	30.7	30.3	31.1	31.6
8H 4H	29.6	30.5	30.0	30.9	31.3	29.4	30.3	29.8	30.7	31.1
6H	30.4	31.1	30.8	31.5	32.0	30.1	30.8	30.6	31.2	31.7
8H	30.7	31.3	31.2	31.8	32.3	30.3	31.0	30.8	31.4	31.9
12H	30.9	31.5	31.4	31.9	32.5	30.5	31.1	31.0	31.6	32.1
12H 4H	29.6	30.4	30.1	30.8	31.3	29.4	30.2	29.9	30.6	31.1
6H	30.4	31.1	30.9	31.5	32.0	30.2	30.8	30.6	31.3	31.7
8H	30.8	31.3	31.3	31.8	32.3	30.5	31.0	31.0	31.5	32.0
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117, 1236 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.7)

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:JYH  
Test Date:2020-03-28

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.950m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

Test:U:12.00V I:1.100A P:13.20W PF:1.000 Freq:0Hz Lamp Flux:1235.82x1 lm		
NAME: D81201208NO	TYPE:	WEIGHT:
SPEC.:D81201208NO-9NWDA012WC0100	DIM.: 1000*8*1.5	SERIAL No.:01
MFR.: COLORS	SUR.:1000*8	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	45	37	55	44	37	54	44	37	31
0.80	66	55	47	65	54	47	63	53	46	39
1.00	75	64	56	74	63	56	71	64	55	48
1.25	82	71	64	80	70	64	78	69	63	55
1.50	87	77	70	85	76	69	82	74	68	60
2.00	94	85	79	92	84	78	88	82	76	68
2.50	98	90	84	96	89	83	92	86	81	72
3.00	101	94	89	99	93	88	95	90	85	76
4.00	106	100	95	103	98	93	99	94	91	81
5.00	108	103	99	105	101	97	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:JYH  
Test Date:2020-03-28

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.950m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM

Test:U:12.00V I:1.100A P:13.20W PF:1.000 Freq:0Hz Lamp Flux:1235.82x1 lm		
NAME: D81201208NO	TYPE:	WEIGHT:
SPEC.:D81201208NO-9NWDA012WC0100	DIM.: 1000*8*1.5	SERIAL No.:01
MFR.: COLORS	SUR.:1000*8	Shielding Angle:

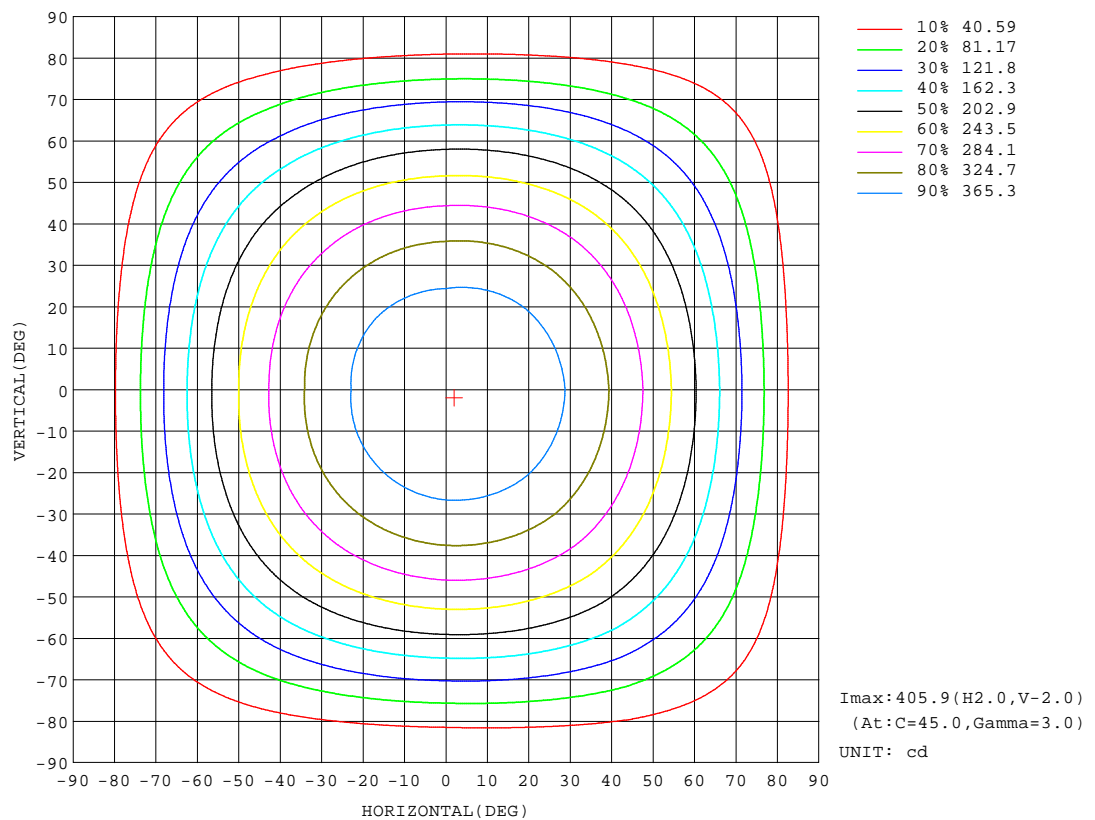

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: JYH  
Test Date: 2020-03-28


Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 10.950m [K=1.0000]  
Remarks:



### AAI Figure

Test:U:12.00V I:1.100A P:13.20W PF:1.000 Freq:0Hz Lamp Flux:1235.82x1 lm		
NAME: D81201208NO	TYPE:	WEIGHT:
SPEC.:D81201208NO-9NWDA012WC0100	DIM.: 1000*8*1.5	SERIAL No.:01
MFR.: COLORS	SUR.:1000*8	Shielding Angle:

Flux out:929.7 lm

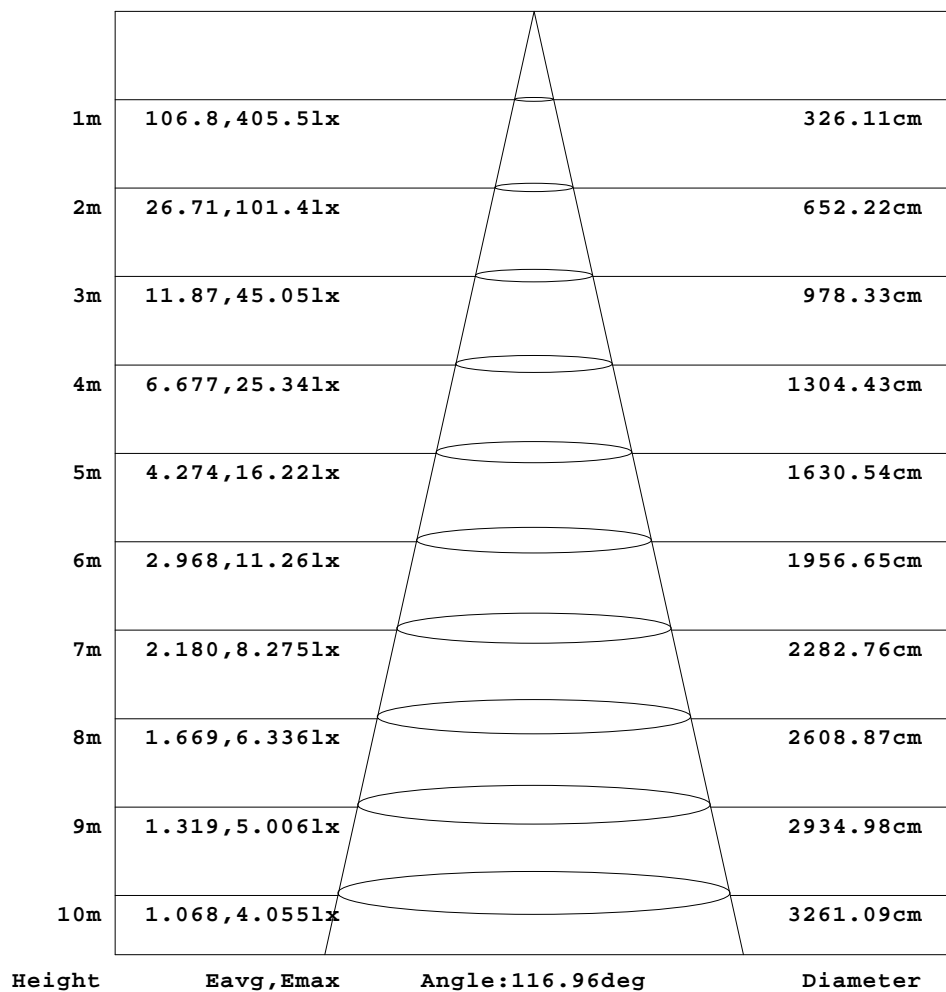


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:JYH  
Test Date:2020-03-28

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.950m [K=1.0000]  
Remarks:

# ISOLUX DIAGRAM


Test:U:12.00V I:1.100A P:13.20W PF:1.000 Freq:0Hz Lamp Flux:1235.82x1 lm		
NAME: D81201208NO	TYPE:	WEIGHT:
SPEC.:D81201208NO-9NWDA012WC0100	DIM.: 1000*8*1.5	SERIAL No.:01
MFR.: COLORS	SUR.:1000*8	Shielding Angle:

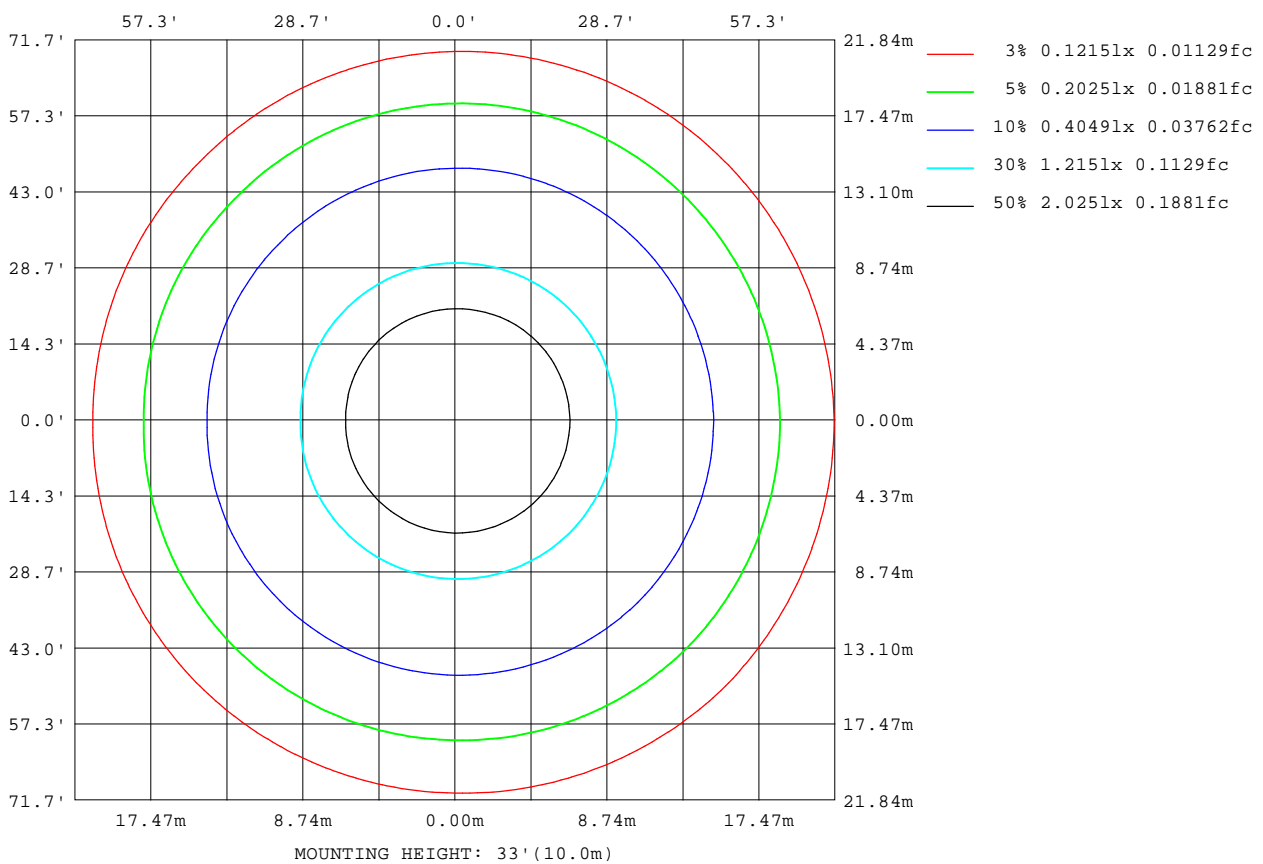

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:JYH  
Test Date:2020-03-28

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.950m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

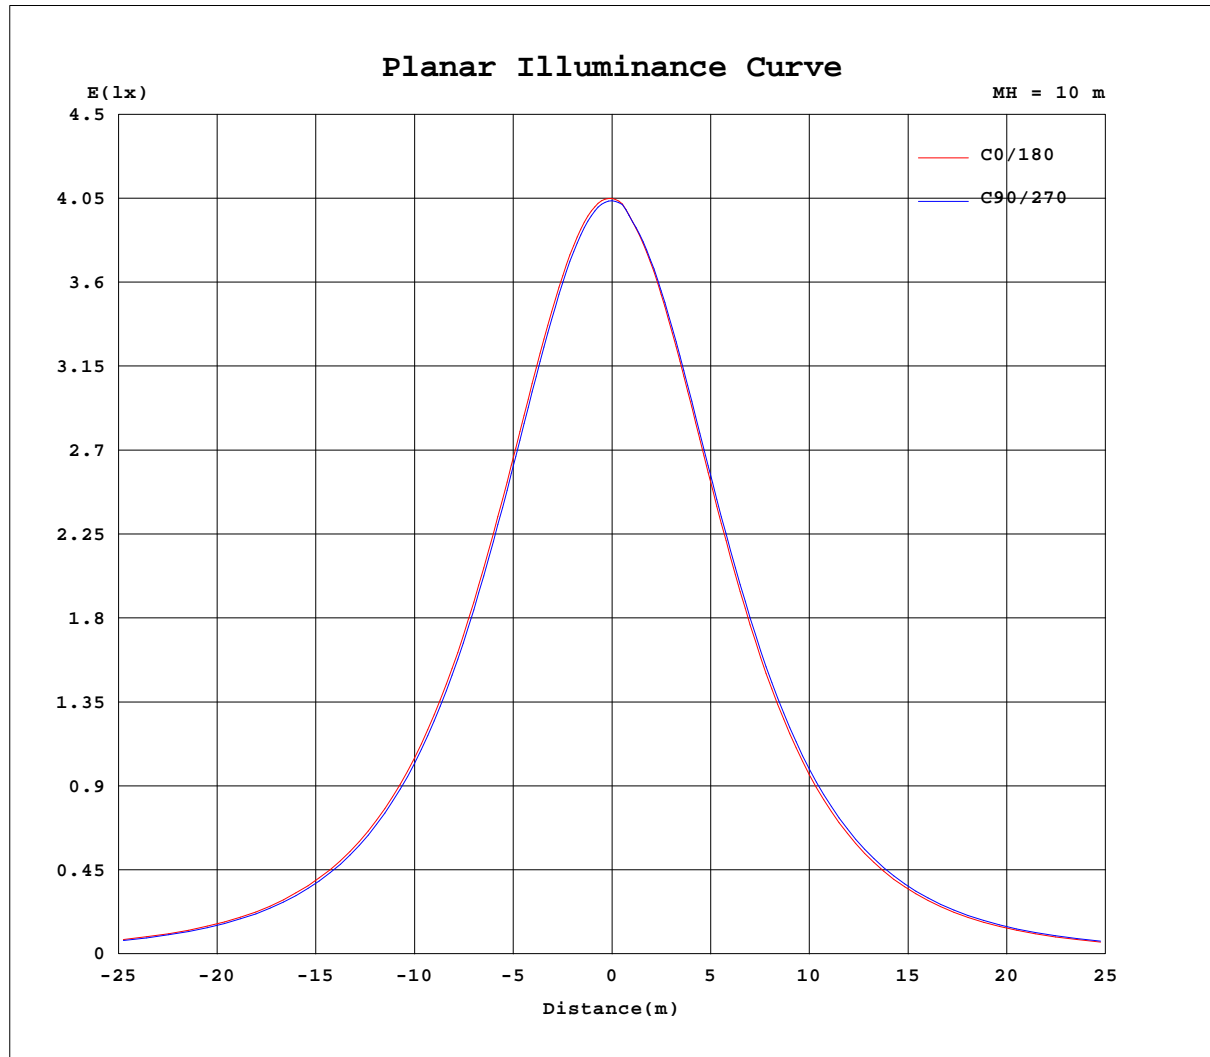

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: JYH  
Test Date: 2020-03-28

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 10.950m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.00V I:1.100A P:13.20W PF:1.000 Freq:0Hz Lamp Flux:1235.82x1 lm		
NAME: D81201208NO	TYPE:	WEIGHT:
SPEC.:D81201208NO-9NWDA012WC0100	DIM.: 1000*8*1.5	SERIAL No.:01
MFR.: COLORS	SUR.:1000*8	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	45	90	135	180	225	270	315										
0	405	405	404	405	405	405	404	405										
5	405	406	403	403	401	402	400	404										
10	402	404	399	396	394	397	395	400										
15	397	395	392	388	385	388	387	394										
20	388	386	383	377	373	376	377	384										
25	376	375	370	364	359	362	363	371										
30	361	360	355	347	341	344	347	356										
35	343	342	336	328	321	324	328	337										
40	322	321	314	306	298	301	306	315										
45	297	297	289	281	272	275	281	290										
50	270	269	262	253	244	247	253	262										
55	240	239	231	222	213	216	222	232										
60	206	206	196	189	179	181	189	197										
65	170	171	161	154	144	146	154	161										
70	133	133	124	117	108	109	117	124										
75	94.7	94.8	86.1	80.2	72.1	73.1	80.5	86.8										
80	57.9	57.8	50.4	45.6	39.1	40.0	46.2	51.4										
85	26.7	26.8	21.4	18.6	14.1	15.0	18.2	22.2										
90	7.66	7.13	2.02	4.70	2.53	2.96	1.03	5.38										
95	1.83	1.77	1.30	1.67	0.96	0.88	0.48	0.68										
100	1.26	1.34	1.29	1.40	1.09	0.96	0.85	0.82										
105	1.56	1.61	1.64	1.69	1.54	1.38	1.33	1.27										
110	2.02	2.04	2.13	2.06	2.00	1.78	1.79	1.75										
115	2.53	2.57	2.73	2.49	2.45	2.19	2.20	2.17										
120	3.04	3.07	3.22	2.87	2.84	2.62	2.61	2.52										
125	3.50	3.51	3.64	3.23	3.24	3.03	2.95	2.82										
130	3.94	3.89	4.01	3.60	3.60	3.42	3.27	3.10										
135	4.37	4.20	4.29	3.95	3.92	3.81	3.55	3.37										
140	4.68	4.44	4.55	4.30	4.21	4.20	3.75	3.55										
145	5.02	4.66	4.69	4.63	4.44	4.59	4.00	3.73										
150	5.22	4.83	4.84	4.94	4.66	4.90	4.38	3.94										
155	5.54	5.00	5.12	5.25	4.93	5.23	4.86	4.23										
160	5.78	5.22	5.50	5.54	5.20	5.55	5.30	4.68										
165	6.08	5.56	5.92	5.77	5.47	5.80	5.71	5.33										
170	6.13	6.01	6.28	6.04	5.51	6.06	6.18	5.96										
175	5.90	6.52	6.67	6.48	5.49	6.39	6.61	6.53										
180	5.98	6.94	6.94	6.94	5.98	6.89	6.95	6.95										

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:JYH  
Test Date:2020-03-28

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:10.950m [K=1.0000]  
Remarks: